



Quick Reference Guide

OTOFIX EvoScan Ultra

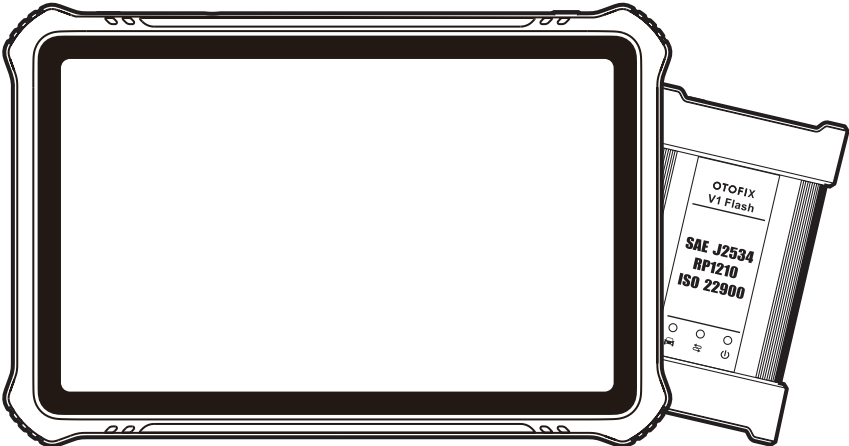


Thank you for purchasing this OTOFIX EvoScan Ultra diagnostics tool. This tool is manufactured to a high standard and — when used according to these instructions and properly maintained — will provide years of trouble-free performance.

OTOFIX EvoScan Ultra

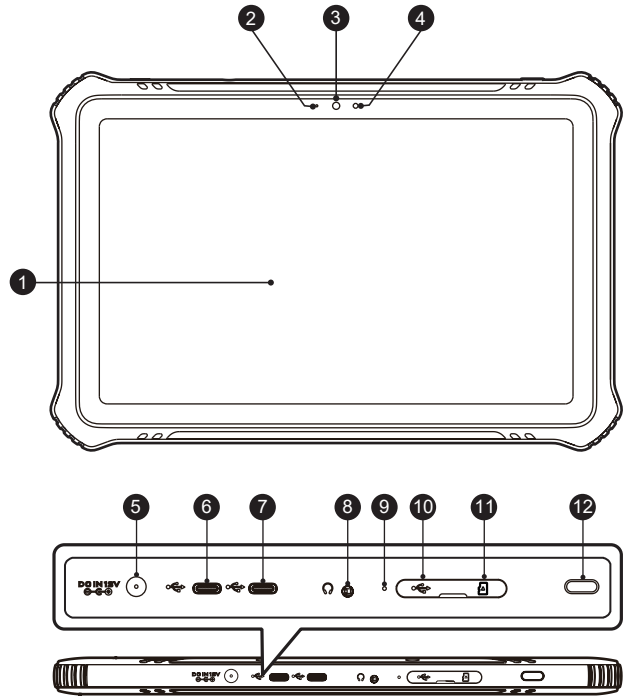


- 1. 10.4-inch Touchscreen
- 2. Ambient Light Sensor — detects ambient brightness
- 3. Front Camera
- 4. Power LED
- 5. DC Power Supply Input Port
- 6. USB Port
- 7. USB Port
- 8. Headphone Jack
- 9. Microphone
- 10. Mini USB Port
- 11. SD Card Slot
- 12. Power/Lock Button — turns the device on & off with long press, or locks the screen with short press

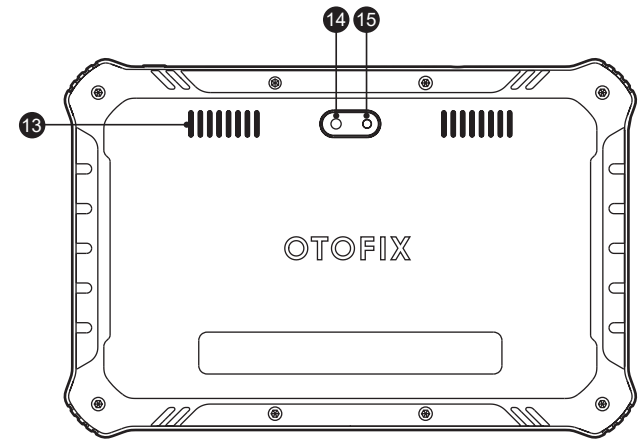

- 13. Speaker
- 14. Rear Camera
- 15. Camera Flash

OTOFIX V1 Flash

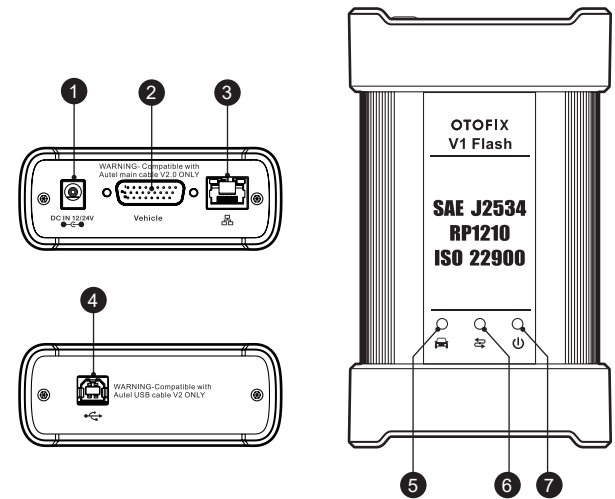

- 1. DC Power Supply Input Port
- 2. Vehicle Data Connector
- 3. Ethernet Port
- 4. USB Port
- 5. Vehicle LED — flashes green when the device is communicating with the vehicle

- 6. Connection LED — refer to Table 1-1 Connection LED Description for details
- 7. Power LED — refer to Table 1-2 Power LED Description for details

Table 1-1 Connection LED Description

LED	Color	Description
Connection	Green	Lights solid green when connected with the tablet via the USB cable.
	Blue	Lights solid blue when connected via Bluetooth.

Table 1-2 Power LED Description

LED	Color	Description
Power	Yellow	Lights solid yellow automatically at power up when VCI is self-testing.
	Green	Lights solid green when powered on.
	Red	<ul style="list-style-type: none"> Lights solid red when system failure has occurred. Flashes red when VCI is upgrading.

Getting Started




IMPORTANT: Before operating or maintaining this unit, please read these instructions carefully, paying extra attention to the safety warnings and precautions. Failure to use the unit correctly may cause damage and/or personal injury and will void the limited product warranty.




WARNING: The OTOFIX V1 Flash is compatible with OTOFIX main cable V2.0 only.

1




- Connect the OTOFIX main cable V2.0 to the Vehicle Data Connector on the V1 Flash and tighten the thumb screws.

2




- Connect the cable's 16-pin adapter to the vehicle's DLC, which is generally located under the vehicle dashboard.

3



- Long press the **Power/Lock** button to power up the tablet. Ensure the tablet has a charged battery or is connected to the supplied DC power supply.


4

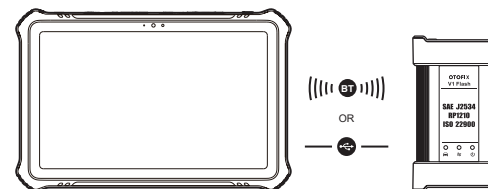

- Connect the tablet with the V1 Flash via Bluetooth or the included USB cable to establish a communication link. Use only the USB cable connection when programming.

NOTE: The diagnostics tablet and the V1 Flash are configured to automatically synchronize with each other on the initial use, therefore, the pairing is not required.

5

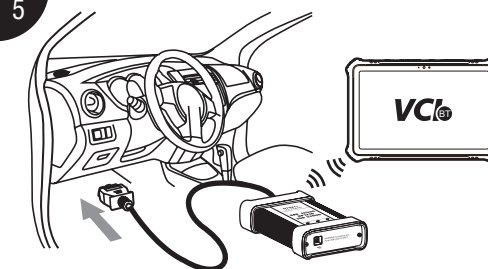

- When the V1 Flash is properly connected to the vehicle and the tablet, the VCI status button at the bottom bar on the screen displays a green badge. This indicates your diagnostics tablet is ready to start vehicle diagnosis.

OTOFIX

www.otofixtech.com